arXiv:1210.0891v1 [cs.IT] 2 Oct 2012

An Interference-Adjustable Distributed Algorithm for K-user MIMO Interference Networks

George C. Alexandropoulos and Constantinos B. Papadias
Broadband Wireless and Sensor Networks Group, Athens Information Technology (AIT),
19.5 km Markopoulo Avenue, 19002 Peania, Athens, Greece
e-mails: {alexandg, cpap}@ait.gr

***Abstract*—It is already well-known that interference alignment (IA) achieves the sum capacity of the K-user interference channel at the high interference regime. On the other hand, it is clear that in the very low interference regime, K (as opposed to $K/2$) degrees of freedom (DoF) can be accessed by simple ("myopic") single-link multiple-input multiple-output (MIMO) techniques such as waterfilling. Recent results have indicated that in certain low-to-moderate interference cases, treating interference as noise may in fact be more preferable. In this paper, we present a distributed iterative algorithm for K-user MIMO interference networks which attempts to adjust itself to the interference regime at hand, in the above sense. The proposed algorithm combines the waterfilling solution with joint mean squared error minimization to unveil the available DoF of the interference channel and to perform IA, as necessary. Sum-rate computer simulations for the proposed algorithm over Ricean fading channels show that, in the interference-limited regime, our algorithm reconfigures itself in order to achieve IA whereas, in the low-to-moderate interference regime, it leads itself towards interference-myopic MIMO transmission.**

I. INTRODUCTION

Interference alignment (IA) is a recently proposed transmission technique for the K-user interference channel which is shown to achieve a sum-rate multiplexing gain of $K/2$ at the high interference regime [1], [2]. IA is based on appropriate linear precoding at the transmitters, aiming at post-receiver processing interference cancellation, and requires only global channel state information at all participating transceivers.

Exploiting the space dimension of multiple-input multiple-output (MIMO) systems to perform IA, several research works present IA-achieving precoding designs [1]–[10] and investigate the feasibility of IA [11], [12] for the K-user MIMO interference channel. For the special case of $K = 3$, a closed-form solution for IA was presented in [2] that was further processed in [10] for increased sum-rate performance. However, for $K > 3$ MIMO communicating pairs, closed-form solutions for IA are in general unknown and several iterative algorithms have been recently proposed (see e.g. [3]–[10] and references therein). The vast majority of those algorithms targets at implicitly achieving IA through the optimization of a constrained objective function. To this end, several objective functions have been considered, such as for example: *i*) minimization of the total interference leakage [5], [8], *ii*) minimization of the sum of least squared errors [13], *iii*) minimization of the mean squared error (MSE) [3], [6], [9], *iv*) maximization of the signal-to-interference-plus-noise ratio (SINR) [5], [6] and *v*) maximization of the sum-rate performance [4], [7], [10].

Although IA attains the optimum rate scaling at the high interference regime, there are certain combinations of SINR regimes and channel conditions where it does not [14]–[16]. For example, the authors in [15] analyzed conditions for the intended and interference MIMO channels under which treating interference as noise at the receivers is sum-capacity achieving. Very recently, the sum-rate performance results of [16], for K-user MIMO networks with asymmetric average powers and line-of-sight (LOS) conditions among the intended and interference channels, demonstrated certain regimes where interference-myopic MIMO transmission yields superior performance to IA.

Based on the above, it would be desirable to devise a sum-capacity-achieving transmission design for the K-user MIMO interference channel that is transparent to the interference conditions. To the best of our knowledge, the available transmission techniques for the K-user interference channel must know a priori the interference conditions so as to choose between the two extremes: treating interference as noise or performing IA. Inspired by the distributed IA algorithm of [5] and the results of [16], in this paper we present a distributed iterative interference handling algorithm that combines the waterfilling (WF) solution [17] with the minimum MSE (MMSE) criterion to unveil the available degrees of freedom (DoF) of the interference channel and to perform IA, as necessary. Early numerical evidence corroborates our expectation that the proposed technique reconfigures itself so as to allow the maximum attainable sum rate for the interference channel conditions at hand.

Notation: Vectors and matrices are denoted by boldface lowercase and capital letters, respectively. The transpose conjugate and the determinant of matrix $\mathbf{A}$ are denoted by $\mathbf{A}^{\mathrm{H}}$ and $\det(\mathbf{A})$, respectively, whereas $[\mathbf{A}]_{i,j}$ represents the (i,j) element of $\mathbf{A}$. $\mathbf{I}_n$ is the $n \times n$ identity matrix and $\mathrm{diag}\{\mathbf{a}\}$ represents a diagonal matrix with vector $\mathbf{a}$ in its main diagonal. The expectation operator is denoted as $\mathrm{E}\{\cdot\}$ whereas, $X \sim \mathcal{CN}\left(\mu, \sigma^2\right)$ represents a random variable following the complex normal distribution with mean μ and variance σ^2.

II. SYSTEM AND CHANNEL MODEL

We present below the K-user MIMO interference system model and the wireless channel model under consideration.

A. System Model

A multiuser MIMO system consisting of K pairs of communicating users is considered. In particular, each transmitting user (Tx) k, where $k = 1, 2, \ldots, K$, equipped with $n_{\mathrm{T}}^{[k]}$ antennas wishes to communicate with the $n_{\mathrm{R}}^{[k]}$-antenna receiving user (Rx) k. All K simultaneous transmissions of symbols $\mathbf{s}_k \in \mathbb{C}^{d_k \times 1}$ $\forall k$, with $d_k \leq \min(n_{\mathrm{T}}^{[k]}, n_{\mathrm{R}}^{[k]})$, are assumed perfectly synchronized and each Tx k processes $\mathbf{s}_k$ with a linear precoding matrix $\mathbf{V}_k \in \mathbb{C}^{n_{\mathrm{T}}^{[k]} \times d_k}$ before transmission. For the transmitted power per Tx k $\mathbb{E}\{||\mathbf{V}_k \mathbf{P}_k^{\frac{1}{2}} \mathbf{s}_k||^2\} \leq \mathrm{P}$ with P being the total power constraint per Tx and $\mathbf{P}_k = \mathrm{diag}\{[P_1^{(k)}\ P_2^{(k)}\ \ldots\ P_{d_k}^{(k)}]\}$, where $n = 1, 2, \ldots, d_k$, denotes the power allocated to the nth data stream at Tx k. Without loss of generality, it is assumed throughout this work that $\mathbb{E}\{\mathbf{s}_k \mathbf{s}_k^{\mathrm{H}}\} = \mathbf{I}_{d_k}$ $\forall k$. The baseband received signal at Rx k can be mathematically expressed as

$$\mathbf{y}_k = \mathbf{H}_{k,k} \mathbf{V}_k \mathbf{P}_k^{\frac{1}{2}} \mathbf{s}_k + \sum_{\ell=1, \ell \neq k}^{K} \mathbf{H}_{k,\ell} \mathbf{V}_\ell \mathbf{P}_\ell^{\frac{1}{2}} \mathbf{s}_\ell + \mathbf{n}_k \tag{1}$$

where $\mathbf{H}_{k,\ell} \in \mathbb{C}^{n_{\mathrm{R}}^{[k]} \times n_{\mathrm{T}}^{[\ell]}}$, with $\ell = 1, 2, \ldots, K$, denotes the channel matrix between the kth Rx and the ℓth Tx, and $\mathbf{n}_k \in \mathbb{C}^{n_{\mathrm{R}}^{[k]} \times 1}$ represents the zero-mean complex additive white Gaussian noise vector with covariance matrix $\sigma_k^2 \mathbf{I}_{n_{\mathrm{R}}^{[k]}}$. After signal reception, each Rx k is assumed to process $\mathbf{y}_k$ with a linear filter $\mathbf{U}_k \in \mathbb{C}^{n_{\mathrm{R}}^{[k]} \times d_k}$ as $\mathbf{U}_k^{\mathrm{H}} \mathbf{y}_k$.

B. Channel Model

The flat fading channel model of [16] is assumed for which the channel matrix between Tx ℓ and Rx k is given by

$$\mathbf{H}_{k,\ell} = \begin{cases} \overline{\mathbf{H}}_{k,\ell}, & k = \ell \\ \alpha_{k,\ell} \overline{\mathbf{H}}_{k,\ell}, & k \neq \ell \end{cases} \tag{2}$$

where parameter $\alpha_{k,\ell} \in [0, 1]$ is used for modeling asymmetric average powers among the intended and the interference channels, and $\overline{\mathbf{H}}_{k,\ell} \in \mathbb{C}^{n_{\mathrm{R}}^{[k]} \times n_{\mathrm{T}}^{[\ell]}}$, which describes Ricean fading, is defined as

$$\overline{\mathbf{H}}_{k,\ell} = \sqrt{\frac{\kappa_{k,\ell}}{\kappa_{k,\ell} + 1}} \mathbf{a}_k(\theta_r) \mathbf{a}_\ell(\theta_t)^{\mathrm{H}} + \sqrt{\frac{1}{\kappa_{k,\ell} + 1}} \mathbf{H}_{k,\ell}^{\mathrm{NLOS}}. \tag{3}$$

In (3), $\kappa_{k,\ell}$ is the Ricean κ-factor and $\mathbf{H}_{k,\ell}^{\mathrm{NLOS}} \in \mathbb{C}^{n_{\mathrm{R}}^{[k]} \times n_{\mathrm{T}}^{[\ell]}}$ is the scattered component of $\mathbf{H}_{k,\ell}$ such that $[\mathbf{H}_{k,\ell}^{\mathrm{NLOS}}]_{i,j} \sim \mathcal{CN}(0, 1)$ $\forall i = 1, 2, \ldots, n_{\mathrm{R}}^{[k]}$ and $\forall j = 1, 2, \ldots, n_{\mathrm{T}}^{[\ell]}$. Moreover, $\mathbf{a}_\ell(\theta_t) \in \mathbb{C}^{n_{\mathrm{T}}^{[\ell]} \times 1}$ and $\mathbf{a}_k(\theta_r) \in \mathbb{C}^{n_{\mathrm{R}}^{[k]} \times 1}$ denote the specular array responses at Tx ℓ and Rx k, respectively, with θ_t and θ_r being the angles of departure and arrival, respectively.

III. An Interference-Adjustable Distributed Algorithm for K-user MIMO Networks

In this section we provide the motivation and formulation of the proposed distributed iterative algorithm. A brief discussion of the algorithm's convergence is also included in the end.

A. Motivation

As mentioned earlier, the sum-capacity-achieving transmission techniques for the K-user MIMO interference channel strongly depend on the interference conditions. Treating interference as noise is better in weak interference levels [14]–[16], whereas IA achieves the sum capacity at the high interference regime [1], [2]. To this end, choosing between the latter two transmission techniques requires the a priori knowledge of the interference conditions. Furthermore, all IA-achieving algorithms require IA feasibility conditions to be met a priori (see e.g. [1]–[10]). For example, for K simultaneous $n_{\mathrm{R}} \times n_{\mathrm{T}}$ MIMO transmissions, each Tx k is restricted to transmit $d_k \leq (n_{\mathrm{R}} + n_{\mathrm{T}})/(K + 1)$ data streams. However, [16] demonstrated low-to-moderate interference scenarios where interference-myopic MIMO transmissions, each aiming at the individual user rate maximization, yield higher sum-rate performance than IA. For those scenarios, there was at least one Tx transmitting more than $(n_{\mathrm{R}}+n_{\mathrm{T}})/(K+1)$ data streams. Finally, a typical feature of IA-achieving techniques is the equal-power allocation on each Tx's data streams [1]–[8]. Inspired by the capacity-optimal strategy for single-user MIMO systems [17] and the sum-rate results for Ricean fading channels in [16], we intuitively expect that the equal-power allocation per Tx will be suboptimal in the weak interference regime and under strong LOS conditions.

Motivated by all the above, we formulate in the following a distributed iterative algorithm that implicitly chooses d_k for each Tx k accordingly to the SINR and LOS conditions and jointly designs $\mathbf{V}_k$'s, $\mathbf{P}_k$'s and $\mathbf{U}_k$'s for all transceivers in the network for increased sum-rate performance.

B. Algorithmic Formulation

After processing $\mathbf{y}_k$ at each Rx k with $\mathbf{U}_k$, the block MSE for the considered K-user MIMO interference network is expressed as

$$\mathcal{J}_{\mathrm{MSE}} = \sum_{k=1}^{K} \mathbb{E}\left\{\left\|\mathbf{U}_k^{\mathrm{H}} \mathbf{y}_k - \mathbf{s}_k\right\|^2\right\}. \tag{4}$$

In this work we are interested in the joint design of $\mathbf{V}_k$'s and $\mathbf{U}_k$'s that minimizes (4). Therefore, the considered joint MMSE constrained optimization problem is mathematically expressed as

$$\begin{aligned} &\min_{\mathbf{V}_k, \mathbf{U}_k} \mathcal{J}_{\mathrm{MSE}} \\ &\mathrm{s.t.}\ ||\mathbf{V}_{kn}||^2 = ||\mathbf{U}_{kn}||^2 = 1 \end{aligned} \tag{5}$$

$\forall k = 1, 2 \ldots, K$ and $\forall n = 1, 2 \ldots, d_k$. In (5), $\mathbf{V}_{kn}$ and $\mathbf{U}_{kn}$ denote the nth column of $\mathbf{V}_k$ and $\mathbf{U}_k$, respectively. Similar to [3], [5], [6], [9] and assuming reciprocal forward and reverse networks, we adopt alternating minimization to iteratively obtain $\mathbf{V}_k$'s and $\mathbf{U}_k$'s satisfying (5), as follows.

1) Forward Network: In the original forward network, given $\mathbf{V}_k$ and $\mathbf{P}_k$ $\forall k = 1, 2 \ldots, K$, the nth column of $\mathbf{U}_k$ at Rx k satisfying (5) is obtained as

$$\mathbf{U}_{kn} = \frac{\mathbf{B}_k^{-1} \mathbf{H}_{k,k} \mathbf{V}_{kn}}{\left\|\mathbf{B}_k^{-1} \mathbf{H}_{k,k} \mathbf{V}_{kn}\right\|} \tag{6}$$

where $\mathbf{B}_k \in \mathbb{C}^{n_{\mathrm{R}}^{[k]} \times n_{\mathrm{R}}^{[k]}}$ is given by

$$\mathbf{B}_k = \sum_{\ell=1}^{K} \mathbf{H}_{k,\ell}\mathbf{V}_\ell\mathbf{P}_\ell\mathbf{V}_\ell^{\mathrm{H}}\mathbf{H}_{k,\ell}^{\mathrm{H}} + \sigma_k^2\mathbf{I}_{n_{\mathrm{R}}^{[k]}}. \tag{7}$$

2) Reciprocal Network: In the reciprocal network, each Rx k utilizes $\mathbf{U}_k$ to transmit to its intended Tx k [5]. Then, each Tx k computes $\mathbf{V}_k$ and $\mathbf{P}_k$ through the following two-step procedure.

Step I: Given $\mathbf{U}_k$ and $\mathbf{P}_k$ $\forall\, k = 1, 2 \ldots, K$, each Tx k computes its receive filter $\mathbf{E}_k \in \mathbb{C}^{n_{\mathrm{T}}^{[k]} \times d_k}$ so as to satisfy a reformulated version of (4) for the reciprocal network. Hence, the nth column, with $n = 1, 2, \ldots, d_k$, of $\mathbf{E}_k$ satisfying (5) is derived as

$$\mathbf{E}_{kn} = \frac{\left(\overleftarrow{\mathbf{B}}_k\right)^{-1}\mathbf{H}_{k,k}^{\mathrm{H}}\mathbf{U}_{kn}}{\left\|\left(\overleftarrow{\mathbf{B}}_k\right)^{-1}\mathbf{H}_{k,k}^{\mathrm{H}}\mathbf{U}_{kn}\right\|} \tag{8}$$

where $\overleftarrow{\mathbf{B}}_k \in \mathbb{C}^{n_{\mathrm{T}}^{[k]} \times n_{\mathrm{T}}^{[k]}}$ is given by

$$\overleftarrow{\mathbf{B}}_k = \sum_{\ell=1}^{K} \mathbf{H}_{\ell,k}^{\mathrm{H}}\mathbf{U}_\ell\mathbf{P}_\ell\mathbf{U}_\ell^{\mathrm{H}}\mathbf{H}_{\ell,k} + \sigma_k^2\mathbf{I}_{n_{\mathrm{T}}^{[k]}}. \tag{9}$$

Step II: After obtaining all $\mathbf{E}_k$'s from (8) and given $\mathbf{P}_\ell$ $\forall\, \ell \neq k$, each Tx k computes its optimum precoding and power allocation matrices for its effective channel $\mathbf{H}_{k,k}\mathbf{E}_k$, assuming knowledge of the interference plus noise covariance matrix $\mathbf{C}_k \in \mathbb{C}^{n_{\mathrm{R}}^{[k]} \times n_{\mathrm{R}}^{[k]}}$, which is given by

$$\mathbf{C}_k = \sum_{\ell=1, \ell\neq k}^{K} \mathbf{H}_{k,\ell}\mathbf{E}_\ell\mathbf{P}_\ell\mathbf{E}_\ell^{\mathrm{H}}\mathbf{H}_{k,\ell}^{\mathrm{H}} + \sigma_k^2\mathbf{I}_{n_{\mathrm{R}}^{[k]}}. \tag{10}$$

In particular, the optimum precoding matrix $\mathbf{F}_k \in \mathbb{C}^{d_k \times d_k}$ for the MIMO channel $\mathbf{H}_{k,k}\mathbf{E}_k$ knowing $\mathbf{C}_k$ is obtained from the singular value decomposition (SVD) of $\mathbf{C}_k^{-\frac{1}{2}}\mathbf{H}_{k,k}\mathbf{E}_k$, i.e. as

$$\mathbf{C}_k^{-\frac{1}{2}}\mathbf{H}_{k,k}\mathbf{E}_k = \mathbf{W}_k\mathbf{\Lambda}_k\mathbf{F}_k^{\mathrm{H}} \tag{11}$$

where $\mathbf{W}_k \in \mathbb{C}^{n_{\mathrm{R}}^{[k]} \times n_{\mathrm{R}}^{[k]}}$ and $\mathbf{\Lambda}_k \in \mathbb{C}^{n_{\mathrm{R}}^{[k]} \times d_k}$. Then, using $\mathbf{F}_k$ and the MMSE-based filter $\mathbf{E}_k$, $\mathbf{V}_k$ for Tx k is obtained as

$$\mathbf{V}_k = \mathbf{E}_k\mathbf{F}_k. \tag{12}$$

Finally, the power allocation matrix $\mathbf{P}_k$ at each Tx k is derived from the WF solution [17] for the channel $\mathbf{C}_k^{-\frac{1}{2}}\mathbf{H}_{k,k}\mathbf{E}_k$.

The proposed distributed iterative algorithm for the K-user MIMO interference channel is summarized in Algorithm 1.

C. Convergence

In each iteration the proposed algorithm attempts to minimize the global objective function $\mathcal{J}_{\mathrm{MSE}}$ via alternating minimization. Similar to several alternating minimization techniques [3], [6], [9], our numerous computer simulation results showed a per iteration MSE reduction and we often observed global convergence. A thorough convergence analysis of the proposed algorithm will be the objective of future work.

The proposed algorithm reconfigures itself to the interference and channel conditions to effectively choose d_k and design $\mathbf{V}_k$ and $\mathbf{P}_k$ at each Tx k. This is accomplished via the WF solution adopted in *Step II*. In particular, the number of data streams per Tx k is initialized as $d_k = \min(n_{\mathrm{T}}^{[k]}, n_{\mathrm{R}}^{[k]})$. Then, at each iteration, the subspace minimizing $\mathcal{J}_{\mathrm{MSE}}$ at each Tx is computed. Within each such subspace, $\mathbf{V}_k$ and $\mathbf{P}_k$ that maximize the instantaneous rate for Tx k are obtained. It is noted that, thanks to the following property [10]

$$\mathrm{span}(\mathbf{H}_{k,k}\mathbf{E}_k) = \mathrm{span}(\mathbf{H}_{k,k}\mathbf{V}_k\mathbf{P}_k), \tag{13}$$

the optimum $\mathbf{V}_k$ and $\mathbf{P}_k$ for $\mathbf{C}_k^{-\frac{1}{2}}\mathbf{H}_{k,k}\mathbf{E}_k$ minimize $\mathcal{J}_{\mathrm{MSE}}$. Note also that allocating zero power to some streams, i.e. reconfiguring the number of data streams d_k, seems not to influence the per iteration global MSE reduction.

Algorithm 1 Interference-Adjustable Joint MMSE

```
initialization: Set $d_k = \min(n_{\mathrm{T}}^{[k]}, n_{\mathrm{R}}^{[k]})\ \forall\, k = 1, 2, \ldots, K$
    and start with arbitary precoding matrices $\mathbf{V}_k \in \mathbb{C}^{n_{\mathrm{T}}^{[k]} \times d_k}$
    and power allocation matrices $\mathbf{P}_k = \mathrm{P}/d_k\mathbf{I}_{n_{\mathrm{T}}^{[k]}}$
Begin iteration
    Forward Network
    Compute $\mathbf{B}_k$ at each Rx $k$ according to (7)
    Obtain each Rx $k$ MMSE-based filter $\mathbf{U}_k$ using (6)
    Reciprocal Network
    Step I:
    Compute $\overleftarrow{\mathbf{B}}_k$ at each Tx $k$ according to (9)
    Obtain all Tx MMSE-based filters $\mathbf{E}_k$'s using (8)
    Step II:
    Compute $\mathbf{C}_k$ at each Rx $k$ according to (10)
    Perform SVD to each $\mathbf{C}_k^{-\frac{1}{2}}\mathbf{H}_{k,k}\mathbf{E}_k$ according to (11)
    Obtain each Tx $k$ precoding matrix $\mathbf{V}_k$ using (12)
    Compute $\mathbf{P}_k$ for each Tx $k$ from the WF solution for
        channel $\mathbf{C}_k^{-\frac{1}{2}}\mathbf{H}_{k,k}\mathbf{E}_k$
Repeat until convergence, or until the number of iterations
    reaches a predefined limit
```

In order to check the convergence of our algorithm, in each iteration we compute the instantaneous achievable sum rate, which is defined as

$$R_a = \sum_{k=1}^{K}\sum_{n=1}^{d_k}\log_2\left(1 + \frac{P_n^{(k)}\mathbf{U}_{kn}^{\mathrm{H}}\mathbf{H}_{k,k}\mathbf{V}_{kn}\mathbf{V}_{kn}^{\mathrm{H}}\mathbf{H}_{k,k}^{\mathrm{H}}\mathbf{U}_{kn}}{\mathbf{U}_{kn}^{\mathrm{H}}\mathbf{D}_k\mathbf{U}_{kn}}\right) \tag{14}$$

where $\mathbf{D}_k \in \mathbb{C}^{n_{\mathrm{R}}^{[k]} \times n_{\mathrm{R}}^{[k]}}$ is given by

$$\begin{aligned}\mathbf{D}_k = &\sum_{\ell=1, \ell\neq k}^{K}\sum_{i=1}^{d_\ell} P_i^{(\ell)}\mathbf{H}_{k,\ell}\mathbf{V}_{\ell i}\mathbf{V}_{\ell i}^{\mathrm{H}}\mathbf{H}_{k,\ell}^{\mathrm{H}} \\ &+ \sum_{j=1, j\neq n}^{d_k} P_j^{(k)}\mathbf{H}_{k,k}\mathbf{V}_{kj}\mathbf{V}_{kj}^{\mathrm{H}}\mathbf{H}_{k,k}^{\mathrm{H}} + \sigma_k^2\mathbf{I}_{n_{\mathrm{R}}^{[k]}}.\end{aligned} \tag{15}$$

Note that obtaining the sum rate using (14) implies that no further receive processing, such as e.g. MMSE successive interference cancellation, apart from $\mathbf{U}_k$ is utilized at each Rx k. The algorithmic iterations terminate whenever R_a converges to a specific value with a prespecified accuracy.

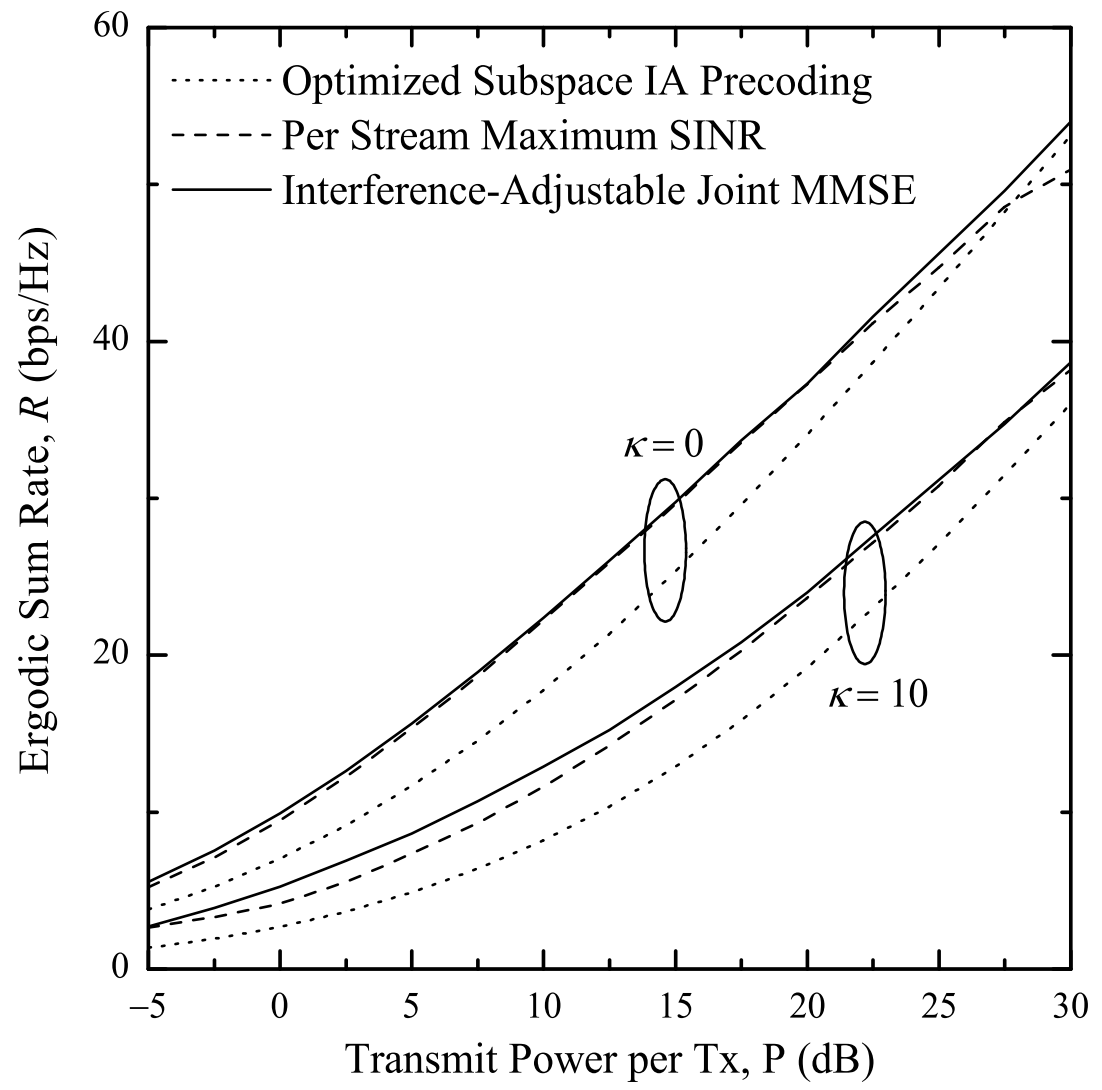

Fig. 1. Sum-rate performance, R, versus transmit power per Tx, P, for 3-user 4×4 MIMO networks over Rayleigh and Ricean fading with $\alpha = 1$.

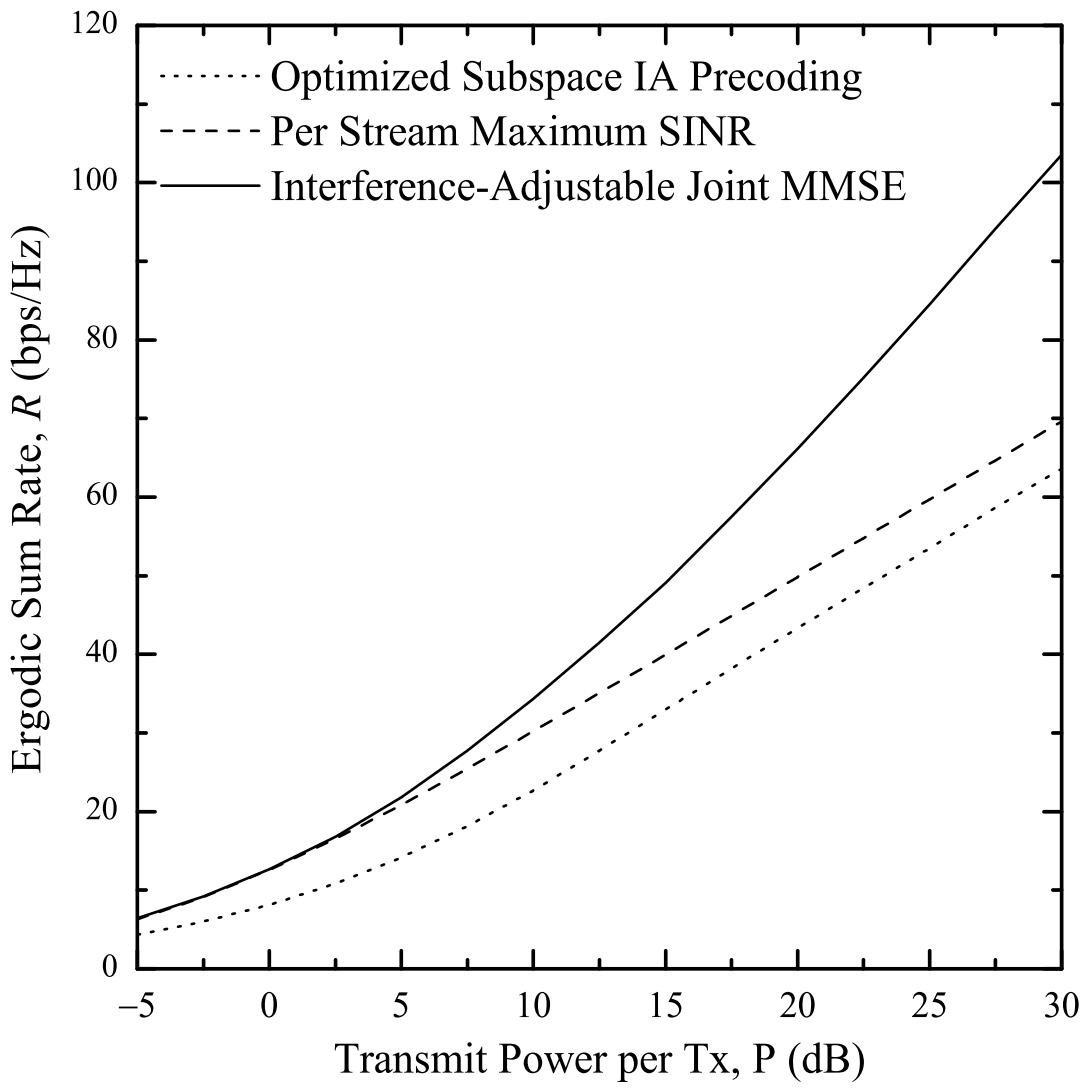

Fig. 2. Sum-rate performance, R, versus transmit power per Tx, P, for 3-user 4×4 MIMO networks over Rayleigh fading with $\alpha = 10^{-3}$.

IV. SUM-RATE PERFORMANCE RESULTS

This section presents numerical simulations for the sum-rate performance of the proposed interference-adjustable distributed algorithm for a 3-user 4×4 MIMO interference network. For comparison purposes, sum-rate computer simulations for the IA-achieving algorithms: *i*) optimized subspace IA precoding [10, Sec. IV.B.1] and *ii*) per stream maximum SINR [2] are also shown. In particular, we have simulated the ergodic sum-rate performance defined as [6]

$$R=\mathcal{E}\left\{\sum_{k=1}^{K}\log_2\left[\det\left(\mathbf{I}_{n_{\mathrm{R}}^{[k]}}+\mathbf{H}_{k,k}\mathbf{V}_k\mathbf{P}_k\mathbf{V}_k^{\mathrm{H}}\mathbf{H}_{k,k}^{\mathrm{H}}\mathbf{R}_k^{-1}\right)\right]\right\} \quad (16)$$

where $\mathcal{E}\{\cdot\}$ denotes the expectation over all channel realizations $\mathbf{H}_{k,\ell}$ $\forall\, k,\ell = 1,2,\ldots,K$ and $\mathbf{R}_k \in \mathbb{C}^{n_{\mathrm{R}}^{[k]} \times n_{\mathrm{R}}^{[k]}}$ is the interference plus noise covariance matrix which is straightforwardly obtained from (10) by just replacing $\mathbf{E}_\ell$'s with the $\mathbf{V}_\ell$'s of (12). The averaging in (16) was evaluated via Monte Carlo simulations for 100 independent channel realizations and the channels were normalized as $\mathbb{E}\left\{\|\mathbf{H}_{k,j}\|_{\mathrm{F}}^2\right\} = n_{\mathrm{R}}^{[k]} n_{\mathrm{T}}^{[j]}$ $\forall\, k,j = 1,2,\ldots,K$. Without loss of generality, for the channel model in Sec II-B, we have assumed that $\alpha_{k,\ell} = \alpha$ and $\kappa_{k,\ell} = \kappa$ $\forall\, k,\ell$. For all algorithms, $\mathbf{V}_k$'s and $\mathbf{U}_k$'s were randomly initialized with unit norm columns. The proposed algorithm was also initialized with $\mathbf{P}_k = \mathrm{P}/4\mathbf{I}_4$ $\forall\, k = 1,2$ and 3 whereas, for both IA-achieving algorithms, IA feasibility conditions were set a priori, i.e. $d_k = 2$ $\forall\, k = 1,2$ and 3. A maximum of 2000 iterations was used per iterative algorithm and each of those algorithms was declared converged when the difference in its objective function between two successive iterations was less than 10^{-7}.

As shown in Fig. 1 for various Ricean fading channels with $\alpha = 1$, the rate of the proposed algorithm is similar to that of the per stream SINR maximization. In particular, in the noise-limited regime, our algorithm computes Tx filters that maximize signal powers over the noise power. The latter maximizations include optimum power allocation, resulting in a slightly higher R than that of the per stream SINR maximization under weak interference conditions. For Rayleigh fading, this behavior happens for P values ranging from -5 to 5 dB whereas, for Ricean fading with $\kappa = 10$, the gains from power allocation are higher and for a wider range of P. To this end, optimum power allocation seems to result in higher R gains as LOS conditions among all users in the network become stronger. More importantly, in the interference-limited regime, the proposed algorithm reconfigures itself so as to achieve IA, which is rate-scaling optimal under strong interference conditions. Figs. 2 and 3 depict R versus P for Ricean fading channels with $\kappa = 0$ and $\kappa = 10$, respectively, and $\alpha = 10^{-3}$. As expected and clearly depicted in both figures, the IA algorithms are restricted to achieve a multiplexing gain of $K/2$. On the contrary, the proposed algorithm achieves all available K DoF and outperforms both IA-achieving algorithms in the entire range of P. It is noted that for this regime the behavior of the proposed algorithm resembles that of the interference-myopic transmissions with $d_k = 4$ $\forall\, k$ presented in [16].

In Fig. 4, the convergence of R_a for Rayleigh fading channels with $\alpha = 1$ and for various values of P is depicted. As shown, R_a converges fast to a specific value and the speed of convergence depends on P. In particular, as P increases, more algorithmic iterations are needed for the convergence of R_a. Similar trends for the convergence of R_a have been found for Ricean fading channels and various values of α. Specifically, additional convergence results have shown that P and α influence the R_a's speed of convergence. As $\mathrm{P} \to 0$ and $\alpha \to 0$ less algorithmic iterations are needed for convergence. Moreover, the convergence of R_a seems to be independent of the Ricean κ-factor. It is finally noted that the sum-rate simulations in Figs. 1–3 showed that the convergence

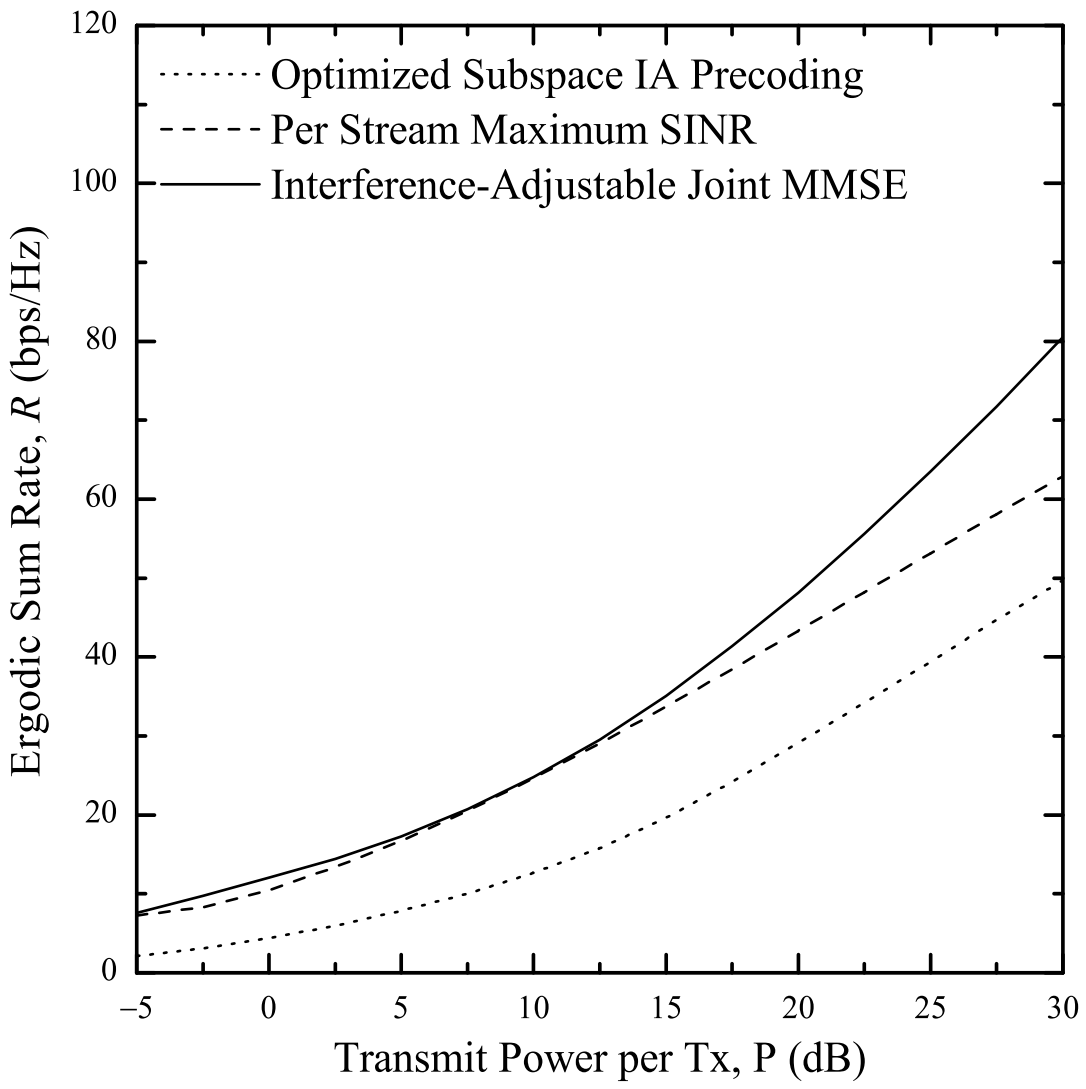

Fig. 3. Sum-rate performance, R, versus transmit power per Tx, P, for 3-user 4×4 MIMO networks over Ricean fading with $\kappa = 10$ and $\alpha = 10^{-3}$.

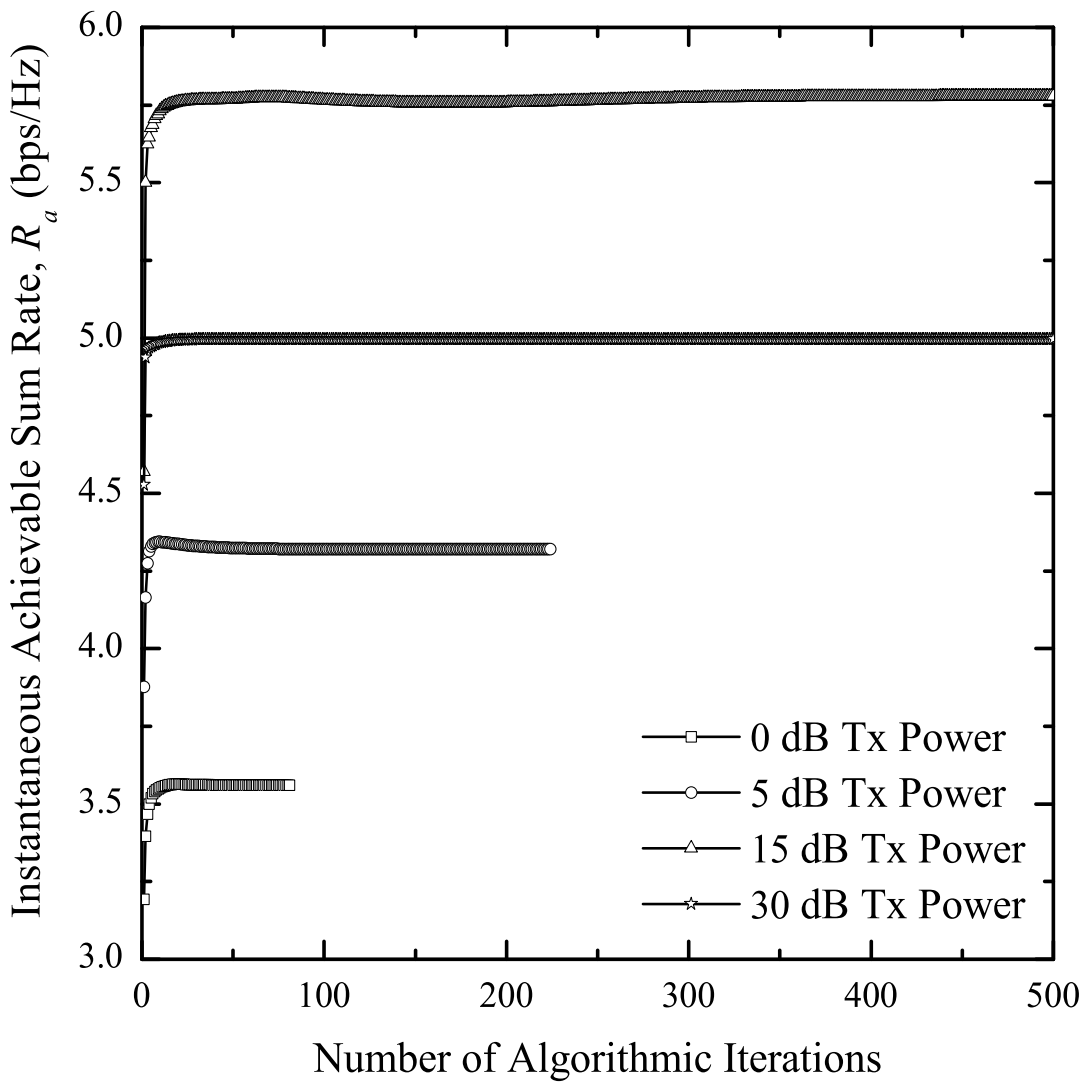

Fig. 4. Convergence of the instantaneous achievable sum rate, R_a, for 3-user 4×4 MIMO networks over Rayleigh fading with $\alpha = 1$.

of the proposed algorithm is much faster than that of the per stream SINR maximization. For example, in Fig. 1 for Rayleigh fading and for $\mathrm{P} = 30$ dB, the proposed algorithm achieves IA after 400 iterations whereas, the per stream SINR maximization has not converged to the IA solution even after 2000 iterations.

V. CONCLUSIONS

In this paper, a novel interference-adjustable distributed iterative algorithm for the K-user MIMO interference channel is presented. The proposed algorithm combines the WF solution, to unveil the available DoF of the interference channel, and iterative joint MMSE, to perform IA, as necessary. As shown, in the interference-limited regime, our algorithm reconfigures itself so as to achieve IA whereas, in the low-to-moderate interference regime, it chooses interference-myopic MIMO transmissions. Furthermore, for all investigated interference cases and channel conditions, it was shown that the sum-rate of the proposed algorithm is higher than that of all considered IA-achieving algorithms.

ACKNOWLEDGMENT

This work has been supported by the European Union Future and Emerging Technologies (FET) Project HiATUS. The project HiATUS acknowledges the financial support of the FET programme, within the Seventh Framework Programme for Research of the European Commission, under FET-open grant number 265578.

REFERENCES

[1] M. Maddah-Ali, A. Motahari, and A. Khandani, “Signaling over MIMO multi-base systems: Combination of multi-access and broadcast schemes,” in *Proc. IEEE ISIT*, Seattle, WA, 9-14 July 2006, pp. 2104–2108.

[2] V. Cadambe and S. A. Jafar, “Interference alignment and degrees of freedom of the K-user interference channel,” *IEEE Trans. on Inf. Theory*, vol. 54, no. 8, pp. 3425–3441, Aug. 2008.

[3] D. A. Schmidt, C. Shiy, R. A. Berryy, M. L. Honigy, and W. Utschick, “Minimum mean squared error interference alignment,” in *Proc. 43rd Asilomar CSSC*, Pasific Grove, USA, 1-4 Nov. 2009, pp. 1106–1110.

[4] I. Santamaria, O. Gonzalez, R. W. Heath, Jr., and S. W. Peters, “Maximum sum-rate interference alignment algorithms for MIMO channels,” in *Proc. IEEE GLOBECOM*, Miami, USA, 6-10 Dec. 2010, pp. 1–6.

[5] K. Gomadam, V. R. Cadambe, and S. A. Jafar, “Distributed numerical approach to interference alignment and applications to wireless interference networks,” *IEEE Trans. on Inf. Theory*, vol. 57, no. 6, pp. 3309–3322, Jun. 2011.

[6] S. W. Peters and R. W. Heath, Jr., “Cooperative algorithms for MIMO interference channels,” *IEEE Trans. on Veh. Tech.*, vol. 60, no. 1, pp. 206–218, Jan. 2011.

[7] F. Negro, I. Ghauri, and D. T. M. Slock, “Deterministic annealing design and analysis of the noisy MIMO interference channel,” in *Proc. IEEE ITA*, San Diego, USA, 6-11 Feb. 2011, pp. 1–10.

[8] H. G. Ghauch and C. B. Papadias, “Interference alignment: A one-sided approach,” in *Proc. IEEE GLOBECOM*, Houston, Texas, 5-9 Dec. 2011, pp. 1–5.

[9] M. Razaviyayn, M. Sanjabi, and Z.-Q. Luo, “Linear transceiver design for interference alignment: Complexity and computation,” *IEEE Trans. on Inf. Theory*, vol. 58, no. 5, pp. 2896–2910, May 2012.

[10] H. Sung, S.-H. Park, K.-J. Lee, and I. Lee, “Linear precoder designs for K-user interference channels,” *IEEE Trans. on Wireless Commun.*, vol. 9, no. 1, pp. 291–301, Jan. 2010.

[11] C. M. Yetis, T. Gou, S. A. Jafar, and A. H. Kayran, “On feasibility of interference alignment in MIMO interference networks,” *IEEE Trans. on Signal Process.*, vol. 58, no. 9, pp. 4771–4782, Sep. 2010.

[12] T. Gou and S. A. Jafar, “Degrees of freedom of the K-user $M \times N$ MIMO interference channel,” *IEEE Trans. on Inf. Theory*, vol. 56, no. 12, pp. 6040–6057, Dec. 2010.

[13] S. W. Peters and R. W. Heath, Jr., “Interference alignment via alternating minimization,” in *Proc. IEEE ICASSP*, Taiwan, Taipei, 19-24 Apr. 2009, pp. 2445–2448.

[14] T. Gou and S. A. Jafar, “Sum capacity of a class of symmetric SIMO Gaussian interference channels within $\mathcal{O}(1)$,” *IEEE Trans. on Inf. Theory*, vol. 57, no. 4, pp. 1932–1958, Apr. 2011.

[15] V. S. Annapureddy and V. V. Veeravalli, “Sum capacity of MIMO interference channels in the low interference regime,” *IEEE Trans. on Inf. Theory*, vol. 57, no. 5, pp. 2565–2581, May 2011.

[16] G. C. Alexandropoulos, S. Papaharalabos, and C. B. Papadias, “On the performance of interference alignment under weak interference conditions,” in *Proc. IEEE IWSSIP*, Vienna, Austria, 11-13 Apr. 2012, pp. 1–5.

[17] E. Telatar, “Capacity of multi-antenna Gaussian channels,” *European Trans. on Telecommun.*, vol. 10, no. 6, pp. 585–595, Dec. 1999.